


Suggested dimensioning range

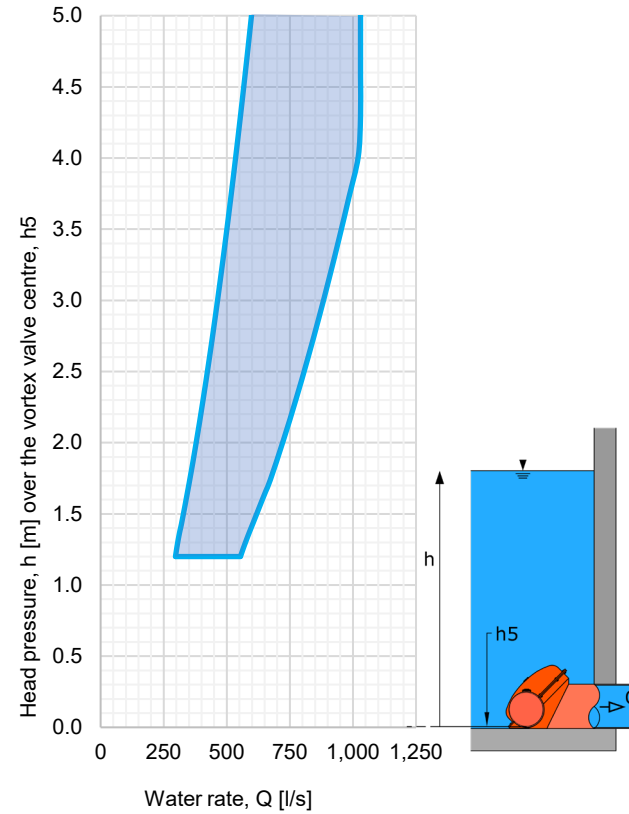

Anmerkninger:

- 1) Installation according to installation instructions.
- 2) All dimensions in [mm].

Min. manhole's diameter recommended:
ø3500mm.

Minimum mounting opening:
DM_{min}: ø200mm

Delliste:

A	1 stk	Vortex valve housing	Glass fiber
B	1 stk	Outlet	Glass fiber
C	1 stk	Inlet	Glass fiber
D	1 stk	Mounting plate	Glass fiber
E	1 stk	Gasket	Celleplast
F	8 stk	Eks bolts	316

Customized product dimensioning criteria

Dim. Water flow Q_b (l/s): _____

Dim. Head pressure h_b (m): _____

Curved mounting plate customized to manhole's diameter,
Dk (m) : _____



Datasheet

Product nr:
SUN452DN600F-800

NRF nr:
-

Versjon:
12-07-2023

Side:
1 av 1

Product name:
**Vortex valve FluidVertic VSU
VSU4DN125P-250, PUR, CUSTOMIZED**

Outlet's dimension:
D-800 outlet

MFT
Pioner i regnvannshåndtering

Copyright
This drawing is protected intellectual property ownership by Norwegian law and may not be unjustifiably copied, used or sent to third parties without MFT's approval. The subscription must also not be used on a tender basis without MFT's permission. The knowledge our customers acquire during project preparation, ordering, purchasing, assembly, etc. The customer cannot utilize themselves on his own, through later own construction of plagiarism etc. Violation of these obligations can result in both criminal and liability.

mft.no